

<b>PRODUCT:</b>	<b>Falcon – IP Camera Reset</b>
<b>ITEM CODE:</b>	

## Introduction


This guide has been formulated to assist with resetting viper camera through IP Manager.

## Initial Device Set-Up

1. Connect camera and laptop to the same switch
2. Open the Viper camera config tool.



You will see any device picked up by the software:

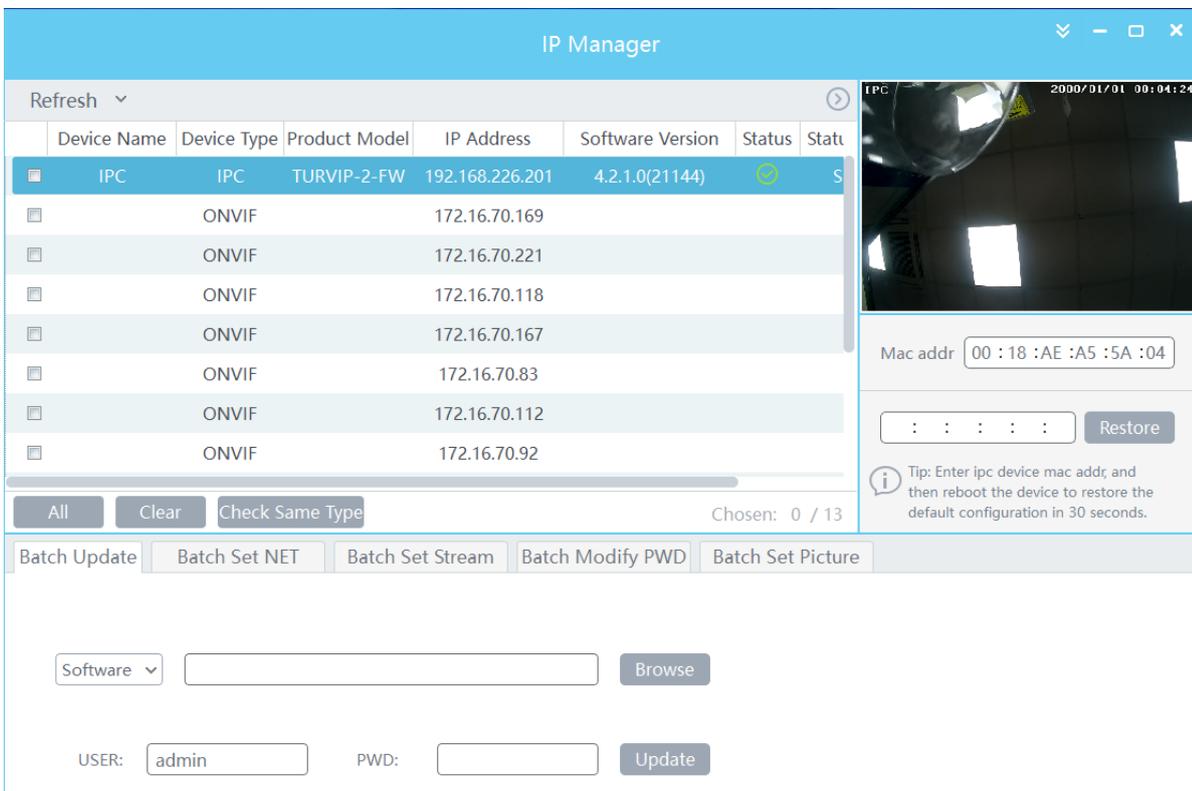

The screenshot shows the IP Manager application window. At the top, there's a 'Refresh' button and a table of detected devices. The table has columns for Device Name, Device Type, Product Model, IP Address, Software Version, Status, and Stat. The first device is highlighted in blue: IPC, IPC, TURVIP-2-FW, 192.168.226.201, 4.2.1.0(21144), and a green status icon. Below the table are buttons for 'All', 'Clear', and 'Check Same Type', along with a 'Chosen: 0 / 13' indicator. A 'Batch Update' section contains buttons for 'Batch Set NET', 'Batch Set Stream', 'Batch Modify PWD', and 'Batch Set Picture'. At the bottom, there are input fields for 'Software' (with a dropdown), 'USER:' (with 'admin' entered), and 'PWD:', along with 'Browse' and 'Update' buttons. On the right side, there's a camera preview window showing a dark scene with a light source. Below the preview, there's a 'Mac addr' field with the value '00 : 18 : AE : A5 : 5A : 04' and a 'Restore' button. A tip icon indicates: 'Tip: Enter ipc device mac addr, and then reboot the device to restore the default configuration in 30 seconds.'

Qvis Lighting & Security Ltd. Telephone: +44 (0)2393 870050	Page 1 of 2 Issued By: Technical Dept
Approved By:	Date:12/03/2024

- Select the camera (which will show preview and Mac address on the right). Re-enter the Mac in the box underneath and click restore.

Name	Device Type	Product Model	IP Address	Software Version	Status	Status Description
	IPC	TURVIP-2-FW	192.168.226.201	4.2.1.0(21144)		Successfully
	ONVIF		172.16.70.169			
	ONVIF		172.16.70.221			
	ONVIF		172.16.70.118			
	ONVIF		172.16.70.167			
	ONVIF		172.16.70.83			
	ONVIF		172.16.70.112			
	ONVIF		172.16.70.92			

Mac addr

Tip: Enter ipc device mac addr, and then reboot the device to restore the default configuration in 30 seconds.

- Click "OK" on the prompt



Device is now reset