


PRODUCT:	Cortex – Playback & Backup
ITEM CODE:	

Introduction

This guide has been formulated to assist with the video playback & backup on Cortex NVR.

Step 1: Playback

- 1. Right click on your mouse and select Playback
- 2. This will then take you to the playback screen.
- 3. On the right-hand side is your option for playback where you can set the date, time and cameras you wish to view. By default, the unit will show you 1 camera. Drag the camera you wish to view into the empty window.
- 4. You can view multiple cameras by changing the layout at the top right and dragging the additional cameras.
- 5. You will then see your recorded footage start to play and you will see a timeline along the bottom of the screen.
- 6. Normal recorded footage will show in green and motion recordings as a spike in the timeline. (Please refer to the motion detect guide on how to set this up) You can click anywhere on the timeline to view that point.

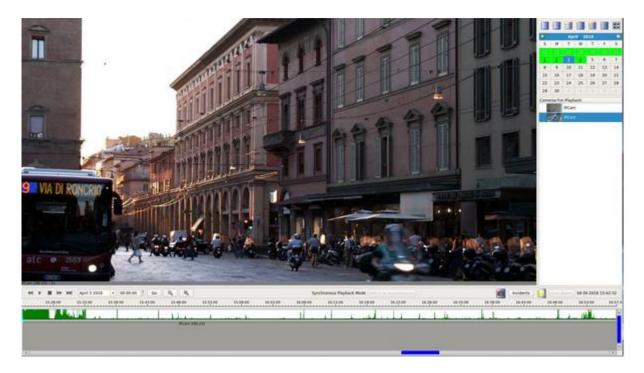

Step 2: Backup

- 1. On the playback screen select the option for Incidents.
- 2. Select New to create a new Incident.

Qvis Lighting & Security Ltd.	Page 1 of 2
Telephone: +44 (0)2393 870050	Issued By: Technical Dept
Approved By:	Date:



- 3. You will then be asked to select what cameras you wish to save and the date and time they occurred.
- 4. Once you have selected the right options, press OK.
- 5. This will save your incident.
- 6. You can repeat this for multiple events.
- 7. Once you have added all the events you want to save, select the yellow save icon on the playback screen.
- 8. Connect your USB device and select it as the Backup Drive.
- 9. Select the incidents you wish to save and press Backup Now.
- 10. This will save your incidents to the USB which can be viewed using a media player such as VLC or Windows Media Player.

							New Backup		3
PCam 248.101	Incident Edit	or		2	IPCam Start	248.1 Time: A	1028-20180405091100 01 pril 5 2018 09:10:28 ril 5 2018 09:11:00	2	
					New	1	Edit	Delete	
	Cameras Select	Weee,			New	E	Edit		
Incident Start Time:	April 2 2018	•		•			stimated Backup Size:	0 MB	
Incident End Time:	April 2 2018 April 2 2018	•	00:10:00	() ()	Backup Drive:	Please		0 MB	
Incident End Time:	April 2 2018	•	00:10:00			Please	stimated Backup Size:	0 MB 'his List	
Incident End Time: Inci	April 2 2018 April 2 2018 ident Duration: 10 min	• • nutes 0 s	00:10:00 seconds		Backup Drive: Find Driv	Please	stimated Backup Size: (e Select a Drive From T Drive Information	0 MB This List	
Incident End Time:	April 2 2018 April 2 2018 ident Duration: 10 mir 180402000000-20180	• • nutes 0 s	00:10:00 seconds		Backup Drive: Find Driv	Please	stimated Backup Size: e Select a Drive From T	0 MB This List	

Qvis Lighting & Security Ltd.	Page 2 of 2
Telephone: +44 (0)2393 870050	Issued By: Technical Dept
Approved By:	Date: